

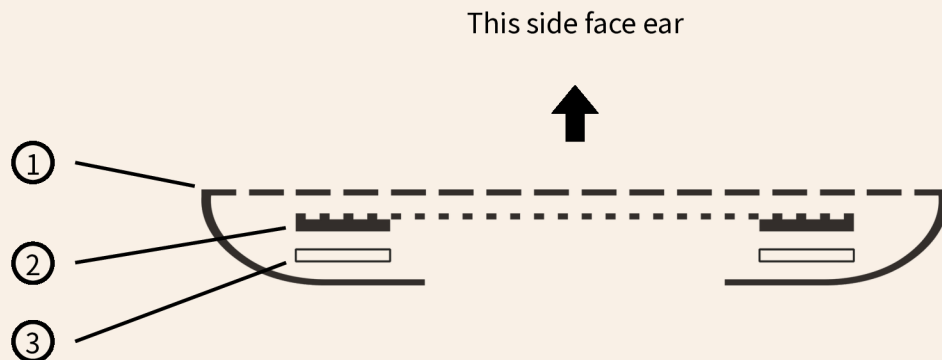


2A-001 Tuning Filter Manual

Each piece of tuning filter consists of 3 components illustrated below:



- ① This mesh has an inner fold that holds component No.2 and No.3 in place. It has a coarser texture than mesh No. 2 and has a rhombus pattern on the mesh.
- ② This mesh has a finer texture than mesh No.1 and has a Zigzag pattern on the mesh. The mesh side should be facing the ear, while the plastic ring that is attached to the mesh should face the driver side. It should be put into the fold inside mesh No.1.
- ③ This is an extra piece of plastic ring that holds the tension of the mesh. It should be put into the fold inside mesh No.1.



Point to note:

- The mesh No. 2 can be left out and use the mesh no.1 and the plastic ring only, for a slightly brighter sound.
- The filter of the ES-2a can be swapped directly without needing to dismantle the earpad.
- Mind the orientation of the tuning filter, with the side of the coarse mesh facing the ear.
- If you took out the components of the filter, make sure the components are in the right orientation according to the graph above when you put them back.